


**NOTES:**

- USE 24" BELL END OF HIGH DENSITY POLYETHYLENE PIPE (HDPE) OR CONCRETE PIPE OR PRE-CAST STRUCTURE WITH AN OPEN BOTTOM
- THE OWNER IS RESPONSIBLE FOR MAINTAINING THE DRYWELL
- USE 4" X 10' SLOTTED PIPE FOR DRAIN TILE, EITHER SLEEVED OR WITH 3" PEA GRAVEL BEDDING



REVISED: 6/14/16 R.G.

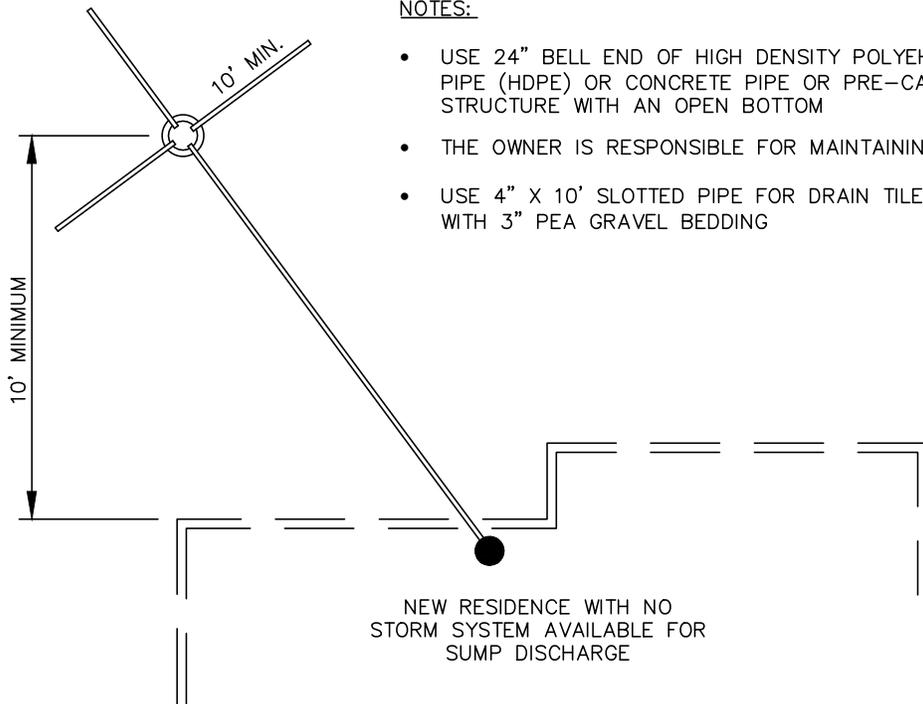


**CITY OF LIVONIA**

Inspection Department  
 33000 Civic Center Drive  
 Livonia, Michigan 48154  
 (734) 466-2580 Office, (734) 466-2095 Fax

**Residential Dry-Well  
 w/ Sump Pump and Drain Tiles**

DATE: 03/27/20 JOB NO.: DW-2

SCALE: 1" = N/A



SHEET 1 OF 1